



STEPFOUR

Pracovní plocha (mm) / Model:

Basic 540	510 x 308
Basic 1000	1024 x 420

Výška osy Z (mm):

70

Posuv:

Trapézové šrouby

Pohon posuvu:

Krokové motory

Vodící systém:

Kluzná ložiska na tvrzených
leštěných pojezdových tyčích

Opakovací přesnost:

$\pm 0,025$ mm

Typ obráběcí hlavy:

Horní fréza
Vřeteno s frekvenčním měničem


Výkon vřetena:

Až do 1 kW / max. 2 kg




Rychlost posuvu:

Basic 540	(2000 mm/min)
Basic 1000	(1250 mm/min)

Basic 540 je možno poříditi
jako stavebnici nebo hotový stroj

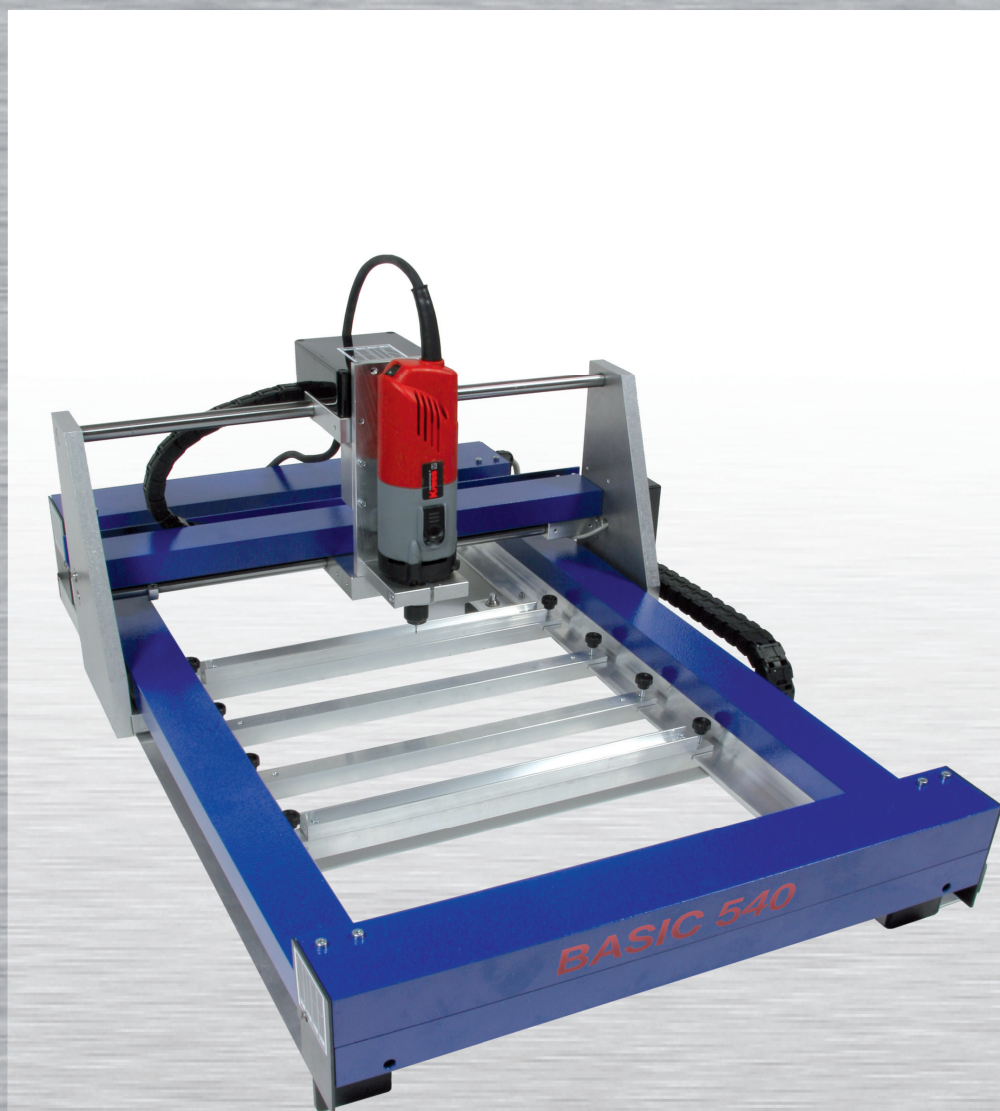

Basic 540 / 1000

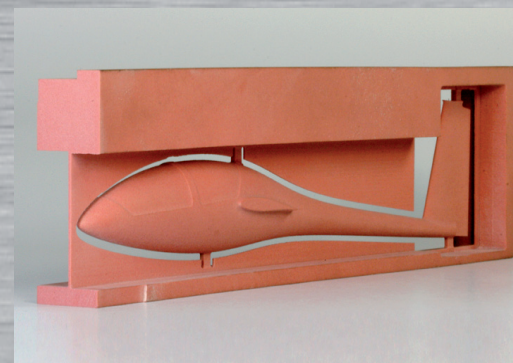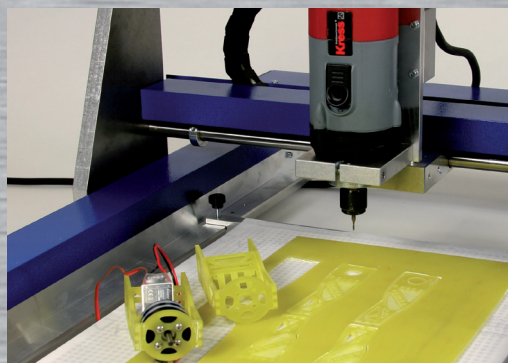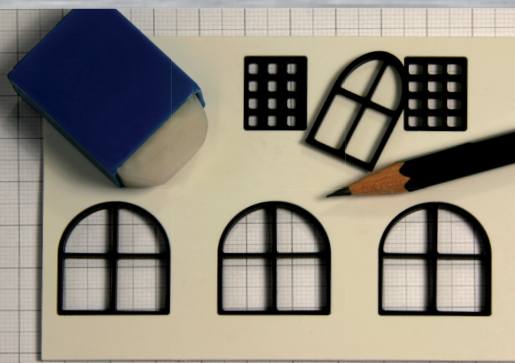

Obchodní zastoupení STEP-FOUR pro ČR a SR:
Pavel Pardovský, J.Moláka 23, 690 03 Břeclav, Česká Republika
Tel.: +420 602 775 523 • Fax: +420 519 327 116
info@step-four.cz • www.step-four.cz



STEPFOUR

Working range (mm):

Basic 540 510 x 308
Basic 1000 1024 x 420

Lift Z-axis (mm):

70

Transmission:

Ball-bearing mounted trapezoid
thread spindles

Feed drive:

Stepper motors

Repeat accuracy:

± 0,025 mm

Guiding system:

Patented integral guide system
with track rollers

Spindle system:

Router
High frequency spindles

Performance of spindle:

Up to 1 kW/max. 2 kg


Max. work feed:

Basic 540 (2000 mm/min)
Basic 1000 (1250 mm/min)

Basic 540 available assembled or
alternatively as kit



Basic 540 / 1000

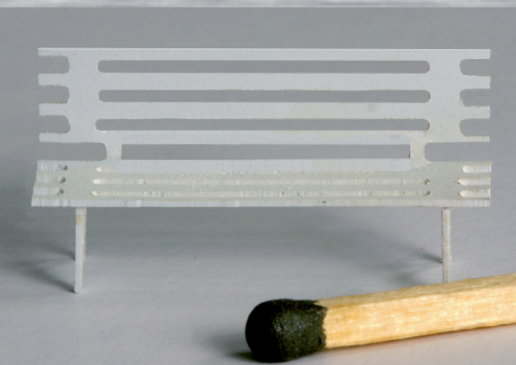

STEP-FOUR GmbH

Bayernstraße 77 • 5071 Wals-Siezenheim, Austria
Tel.: ++ 43-(0)662-459378-0 • Fax: ++ 43-(0)662-459378-20
office@step-four.at • www.step-four.at